




PRODUCT DATASHEET


KBM

CaP System
BNC MALE CONNECTOR

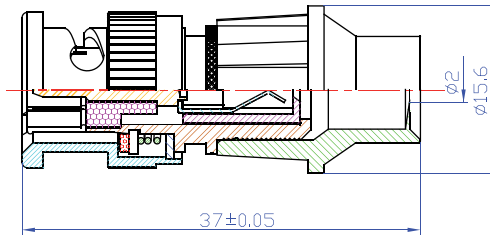


Utilize
these Tools

Stripping Dimension:

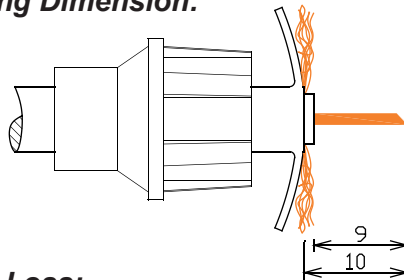

Return Loss:

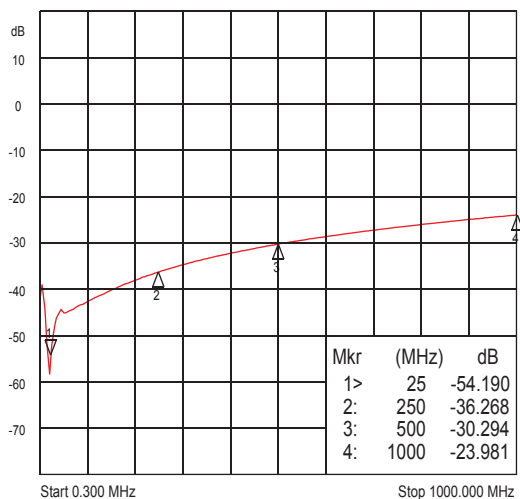

Suitable for Cables:

RG6 quad, RG6, RG59, RG178, ... suitable for all cable with inner conductor from $\varnothing 0,3$ up to $\varnothing 1,1$ mm (from AWG 28 to AWG 18)

Electrical Specification

Impedance: 75 Ohm
 Frequency: 0-1 GHz
 Dielectric W/V: 500 Veff
 Insulation res: 5000 M-Ohm
 Screening Immunity: Class A+

Mechanical Specification

Body Material: Brass - Nickel plated
 Center Contact: Brass - Gold plated
 Shrapnel: P. Bronze - Nickel plated
 Insulator: Derlin
 Bayonet Cap: Zinc - Nickel plated
 Gasket: Silicone
 Washer: Fe - Nickel plated
 Spring: SK5 - Nickel plated
 Inner Retaining Ring: Fe - Nickel plated
 CaP®: Protected Plastic Compound
 Weight: 11.4 g

Environmental Specification

Operating Temp: $-40 \div +120$ °C