





# AMGPSU-I[12,24]-P[24,36] INDUSTRIAL DIN-RAIL 24/36W POWER SUPPLY



## Industrial Power Solutions

AMG's industrial DIN-Rail 24/36W power supplies provide reliable power for AMG standard products and ensure stable equipment operation over a wide temperature range. They are suitable for all AMG standard products (depending on voltage).



|  |  |   |   |
|--|--|---|---|
| <br>PSU 24W<br>12V | <br>PSU 36W<br>24V | <br>Temp<br>-40~+70°C | <br>Mounting<br>DIN |
|--|--|---|---|

[ AMGPSU Series ]

### / OVERVIEW

Designed in a compact, robust DIN rail housing, the AMGPSU-I[12,24]-P[24,36] series industrial power supplies are ideally suited for powering AMG standard Ethernet and analogue fibre transmission equipment. Its wide operating temperature range ensures reliable operation in even the harshest environments.

Available in 12 or 24V output versions ensure the correct power supply is available for any requirement.

The power supply offers a high level of stability and immunity to noise and a low ripple for best in class performance.

Compliant to the international IEC62368 standards for EMC and are safety approved to IEC/EN61000-4, CISPR32, EN55032, UL62368, IEC62368 and EN62368.

A wide voltage input range that features dual-use inputs for both DC and AC voltages that support 85-264V<sub>AC</sub> or 120-370V<sub>DC</sub> ensures the widest possible site support.

A range of other output power levels are available within the AMGPSU product range.

### / FEATURES

- Compact size – ideal for confined spaces, including camera poles and roadside cabinets
- -40°C to +70°C temperature maintains performance in extreme conditions
- DIN rail mountable – quick to install and remove for maintenance
- High efficiency - up to 90% typical
- Universal 85-264V<sub>AC</sub> or 120-370V<sub>DC</sub> input range
- Output short circuit, over-current and over-voltage protection included as standard
- High I/O isolation test voltage up to 4000V<sub>AC</sub>
- Low ripple & noise
- Withstand 300V<sub>AC</sub> surge input for 5 seconds
- EN62368 & UL safety approved
- AMG 3 Year Support Warranty

# Specifications.

## Input.

| Characteristics     | Operating Conditions | Min.                 | Typ. | Max. | Unit |
|---------------------|----------------------|----------------------|------|------|------|
| Input Voltage Range | AC Input             | 85                   | -    | 264  | VAC  |
|                     | DC Input             | 120                  | -    | 370  | VDC  |
| Input Frequency     |                      | 47                   | -    | 63   | Hz   |
| Input Current       | 115VAC               | -                    | -    | 0.9  | A    |
|                     | 230VAC               | -                    | -    | 0.5  |      |
| Inrush Current      | 115VAC               | -                    | 25   | -    |      |
|                     | 230VAC               | -                    | 45   | -    |      |
| Leakage Current     | 264VAC               | 0.25mA RMS max.      |      |      |      |
| Connector           |                      | 2-Way Screw Terminal |      |      |      |

## Output.

| Characteristics          | Operating Conditions                    |                | Min.                             | Typ.  | Max. | Unit |
|--------------------------|---|----------------|----------------------------------|-------|------|------|
| Output Voltage Accuracy  | 0% - 100% Load                          |                | -                                | ±2    | -    | %    |
| Line Regulation          | Rated Load                              |                | -                                | ±0.5  | -    |      |
| Load Regulation          | 230VAC                                  |                | -                                | ±1.5  | -    |      |
| Output Ripple & Noise    | 20MHz Bandwidth<br>(peak-to-peak value) | 12V Output     | -                                | -     | 120  | mV   |
|                          |   | 24V Output     | -                                | -     | 150  |      |
| Temperature Coefficient  |   |                | -                                | ±0.02 | -    | %/°C |
| Stand-by Power Consump.  | 230VAC Input                            | 12V/24V Output | -                                | -     | 0.3  | W    |
| Short Circuit Protection |   |                | Hiccup, Continuous, Self-Recover |       |      |      |
| Over-Current Protection  |   |                | ≥120%Io, Self-Recovery           |       |      |      |
| Over-Voltage Protection  | 12V Output                              |                | ≤16V (Output Clamp or Hiccup)    |       |      |      |
|                          | 24V Output                              |                | ≤36V (Output Clamp or Hiccup)    |       |      |      |
| Minimum Load             |   |                | 0                                | -     | -    | %    |
| Start-up Delay Time      |   |                | -                                | -     | 3    | s    |
| Hold-up Time             | 115VAC                                  |                | -                                | 12    | -    | ms   |
|                          | 230VAC                                  |                | -                                | 60    | -    |      |
| Connector                |   |                | 2-Way Screw Terminal             |       |      |      |

Note: \*The "parallel cable" method is used for ripple and noise test.

## Mechanical.

|               |   |
|---------------|---|
| Case Material | Plastic, Heat-Resistant (UL94V-0)                     |
| Dimensions    | 92.7 × 35 × 58 mm (3.65 × 1.38 × 2.28 in) (H x W x D) |
| Weight        | 0.115 Kg  |
| Cooling       | Free Air Convection                                   |

# Specifications.

## General.

| Characteristics       |                | Operating Conditions   | Min.                     | Typ. | Max. | Unit    |
|-----------------------|----------------|--|--------------------------|------|------|---------|
| Isolation Test        | Input-Output   | Electric Strength Test for 1 min.,<br>(leakage current <5mA) | 4000                     | -    | -    | VAC     |
| Operating Temperature |                |  | -40                      | -    | +70  | °C      |
| Storage Temperature   |                |  | -40                      | -    | +85  |         |
| Storage Humidity      |                |  | -                        | -    | 95   | %RH     |
| Operating Altitude    |                |  | -                        | -    | 2000 | m       |
| Switching Frequency   |                |  | -                        | 65   | -    | kHz     |
| Power Derating        | -40°C to -30°C | 12V Output   | 7.0                      | -    | -    | % / °C  |
|                       |                | 24V Output   | 5.0                      | -    | -    |         |
|                       | +50°C to +70°C |  |                          | 2.5  | -    | -       |
| 85VAC - 100VAC        |                |  | 1.0                      | -    | -    | % / VAC |
| Safety Standard       |                |  | UL62368/EN62368/IEC62368 |      |      |         |
| Safety Class          |                |  | Class II                 |      |      |         |
| MTBF                  |                | MIL-HDBK-217F @ 25°C   | >300,000 hours           |      |      |         |

## Regulatory.



|           |   |  |
|-----------|---|--|
| Emissions | CE  | CISPR32/EN55032 Class B                    |
|           | RE  | CISPR32/EN55032 Class B                    |
| Immunity  | ESD   | IEC/EN 61000-4-2 (Contact ±6KV / Air ±8KV) |
|           | RS  | IEC/EN 61000-4-3 (10V/m)                   |
|           | EFT   | IEC/EN 61000-4-4 (±2KV)                    |
|           | Surge   | IEC/EN 61000-4-5 (Line to Line ±2KV)       |
|           | CS  | IEC/EN 61000-4-6 (10V r.m.s)               |
|           | Voltage Dips, Short Interruptions and Voltage Variations Immunity | IEC/EN 61000-4-11 (0%, 70%)                |

# Part Numbers.


## 24/36W Industrial DIN-Rail Power Supplies

|                |  |
|----------------|--|
| AMGPSU-I12-P24 | Industrial DIN Rail Power Supply, 12V Nominal Output (10.8-13.8V Adjustable), 24W (2A)   |
| AMGPSU-I24-P36 | Industrial DIN Rail Power Supply, 24V Nominal Output (21.6-29.0V Adjustable), 36W (1.5A) |

# Product Characteristic Curve.

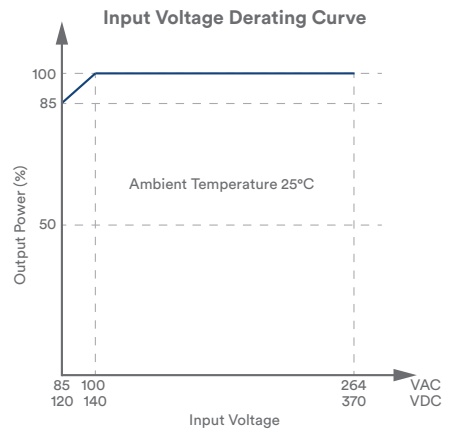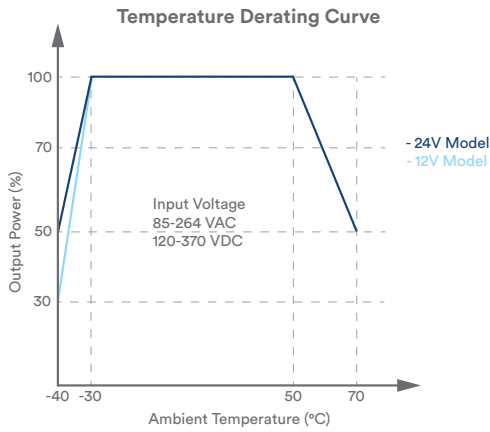

# Product Dimensions.

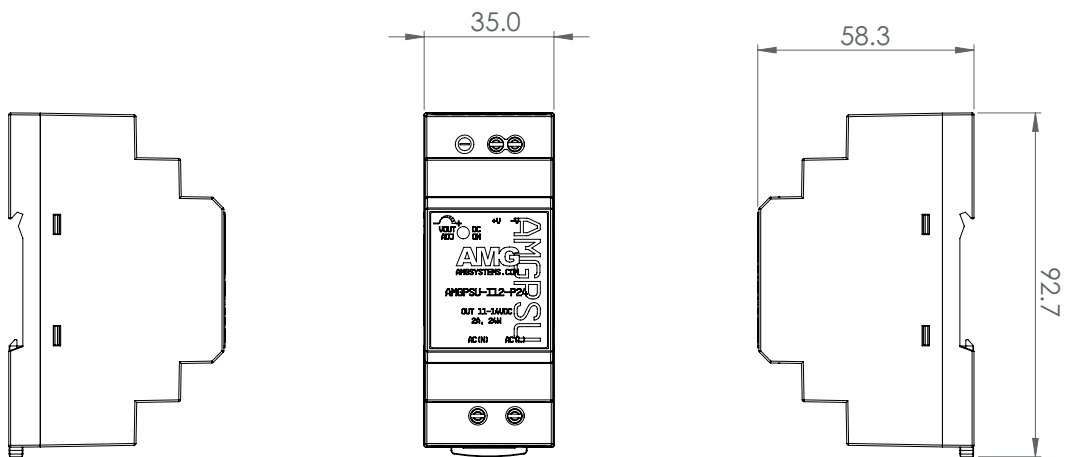

# Notes.

Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ . humidity <75% with nominal input voltage and rated output load.

*In a continuing effort to improve and advance technology, product specifications are subject to change without notice. Please visit [www.amgsystems.com](http://www.amgsystems.com) for the latest product specifications.*